



SOLARKING

Solar Roof Vent V4 Wireless

- Keep your home cooler in summer
- Reduced air conditioning use, means lower energy bills
- Extracts 20x more air than a Whirly Bird
- Reduces roof temperature by up to 30°C
- Solar powered with optional mains back-up
- Thermostatic shut down control prevents heat loss during cooler months
- Wireless remote control with last setting memory, turn on/off, set speed, set timers.
- Brushless constant speed motor, no sudden speed increases for low noise operation
- Easy installation, no electrician required
- Built in automatic mould reduction function
- Suits tile, colourbond and flat roofs
- Rust treated steel body & components

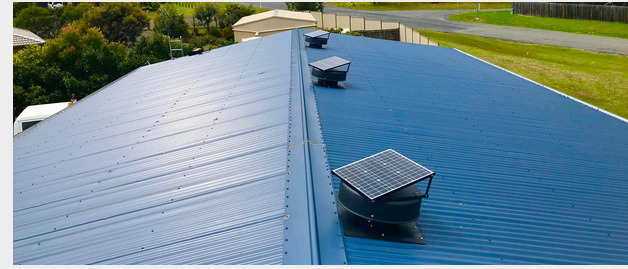

*Get Ready
For Heat Wave*

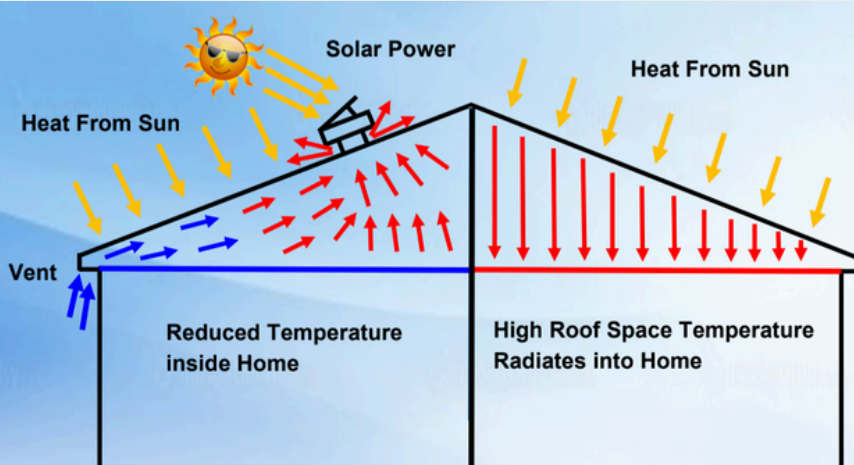

Designed in Australia for Harsh Australian Conditions
www.solarking.net.au

SOLARKING

Solar Roof Vent V4 Wireless

Australian summers continue to get hotter and so do our homes and workplaces. A great solution to tackle this is Solar Roof Ventilation. Installing a solarfan will allow the hot air trapped in your roof to be replaced by cooler ambient air, reducing air conditioning costs and making a big difference to your indoor comfort levels. Temperatures inside your roof can often reach between 50°C to 70°C, with much of this heat then entering your living spaces via your ceiling and walls.

Currently, wind driven “Whirly Birds” can only exhaust around 100CBM (Cubic Metres) of air per hour while the SolarKing 320MM solar fan can exhaust 2100CBM of air per hour, more than 20x the air movement. This makes the SolarKing far more effective keeping your home or business cooler. You can even use multiple solarfans on larger or two storey homes. The SolarKing 320MM Solar Fan can be easily mounted on either tile, Colorbond or flat roofs. The unit also has an adjustable tilt solar panel for use on non north facing roofs or flat roofs.

The updated V4 wireless solar fan, you can adjust the speed of the fan and override the unit to be on or off. The unit also has an automatic function to reduce roof mould. You can also add an optional AC power supply to allow the unit to continue to run when solar drops too low or for after dark.

Specifications

Model: 320MM SRVFW V4 Wireless

Capacity: 2100CBM Per Hour

Motor: 35 Watts, 6-19VDC, 1600RPM Max, Constant speed brushless motor

Solar Panel Type: Monocrystalline PV 42 Watts, 15VDC, heavy duty frame, 3mm tempered glass

Remote: 12 key, 433Mhz, 2x AAA batteries, 20M range

Fan: 300mm balanced 5x metal blade with low resistance

Noise: <45dBA

Automatic Shut Off: <25°C +/- 5% **Automatic Mould Reduce:** Unit runs for 15mins, 3hrs after sun up

Mains Power Back-Up: 240VAC/15VDC 1.5A Plug Pack (Optional)

Product Dimensions: 565x565x260mm **Flashing Dimensions:** 565x565x1mm

Remote Functions: On, Off, Temp Override, Full speed, 3/4, 1/2, 1/4, Timers, 1H, 2H, 4H, 8H

Construction: Aluminum top Cover, electroplated steel body & brackets, stainless steel fasteners

Colour: Black powder coated


Packing Dimensions: 575x575x275mm

Product Weight: 7.8Kgs **Packaging Weight** 9.6Kgs


Warranty: 3 Year Warranty



Make sure you purchase a genuine SolarKing V4 labeled fan

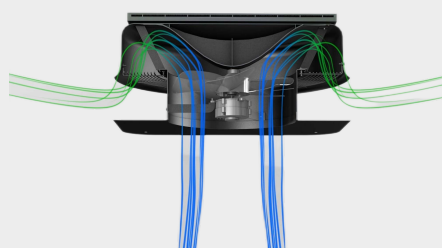

Specially designed internal air deflector to allow higher air flow rate



Solar Panel can rotate 360 degrees

www.solarking.net.au

Specifications subject to change without any notice