



# 1 Instructions



## 1.1 Product Overview

### Connecting Interface












- (1) BAT - Power Connection Busbar
- (2) BAT + Power Connection Busbar
- (3) Circuit Breaker
- (4) Terminal Block
- (5) Insulating Board

## 1.2 Dimensions




## 1.3 Scope of Delivery







				
Battery (x1)	Power cable - negative (x1)	Power cable - positive (x1)	Heat shrinkable sleeve -Black (x2)	Heat shrinkable sleeve -Red (x2)
				
Expansion Bolt (x4)	Cold-pressed terminal (x4)	OT terminal (x2)	Key (x1)	

# 2 Mounting

## Mounted on the wall

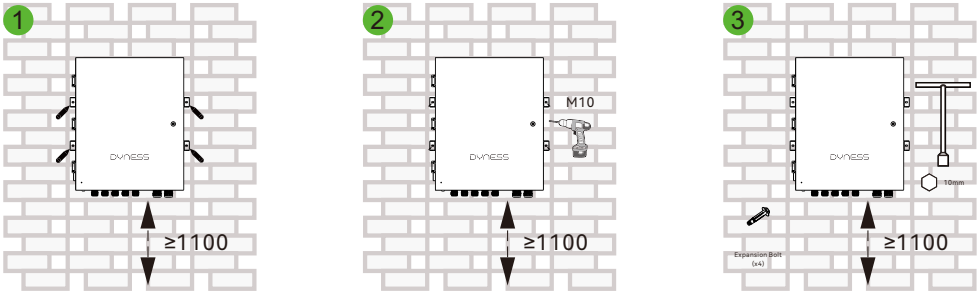

# 3 Electrical Connection

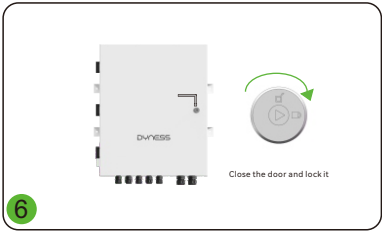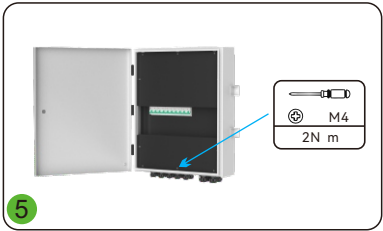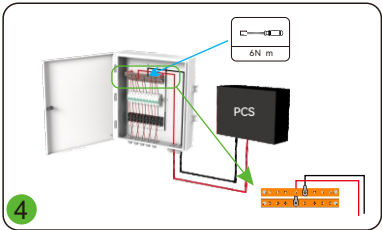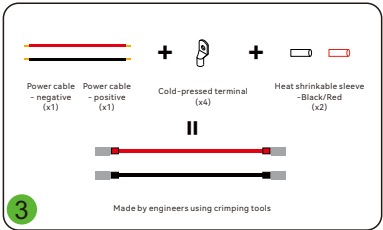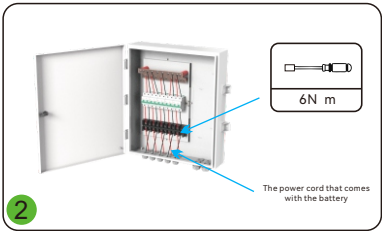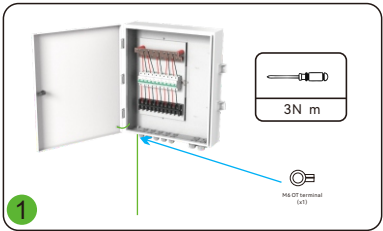



Address: No.688, Liupu Road, Guoxiang Street, Wuzhong Economic Development Zone,  
Suzhou, Jiangsu, China  
Email: [service@dyness-tech.com](mailto:service@dyness-tech.com)  
Tel: +86 400 666 0655  
Web: [www.dyness.com](http://www.dyness.com)



Official Website



Digital version access